



ISOKERN

BVETTO™
Gas Fireplace



BVETTO 36"

Split Firebrick - Red
Running Bond
Summit Pine Log Set



The BEAUTY FROM *within*

The warm embrace of fire has captivated human beings since the dawn of mankind. The Isokern Bvetto has the largest finished opening height of up to 52" and can be installed directly onto combustible floor systems and meets ANSI Z21.50 and CSA 2.22 standard guidelines.




Insight into our technology



Extracted from Iceland's Mt. Hekla volcano, Isokern products are made from the cleanest, purest pumice. Manufactured in the United States, our masonry components cradle the raw power of fire in the safest, most energy-efficient material on earth. Isokern allows architects and their clients to pursue their most inspired designs, while connecting with the natural beauty of fire in a way that, until now, only nature could.

For True CRAFTSMANSHIP HAND LAID *Firebrick*


Choose from an array of firebrick options that will suit any interior decor. Shown below are examples of the most distinctive patterns that deliver the true craftsmanship quality to all Isokern products.




Running Bond



Stack Bond



Herringbone



Basket Weave

Firebrick Sizes:

Full - 9" x 4½" x 2½"

Split - 9" x 4½" x 1¼"

Soap - 9" x 2¼" x 1¼"

Highly DETAILED LOG SET *Selection*

Lively flames and a large ember bed highlight the handcrafted logs, adding efficient heat and unmatched beauty to your fireplace. Included with each log set is the hi/low flame height remote control with electronic ignition that gives you precision control.



Sandhill Oak




Charred Hickory



Summit Pine




BVETTO 36" & 46"

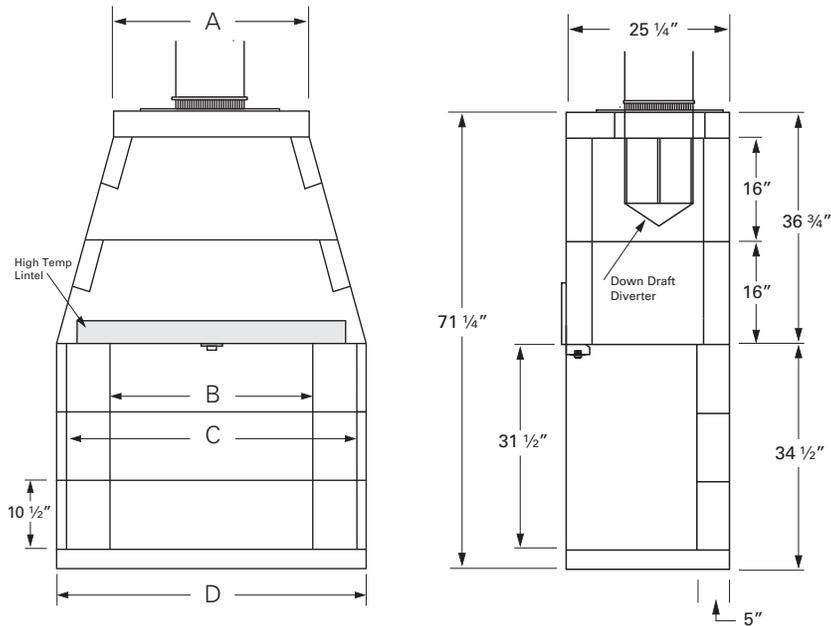

MODEL	A	B	C	D
BVETTO 36	22 1/2"	27 1/4"	36 1/8"	43"
BVETTO 46	33"	37 1/4"	47 1/8"	53"

Note: These are inside rough dimensions before firebrick

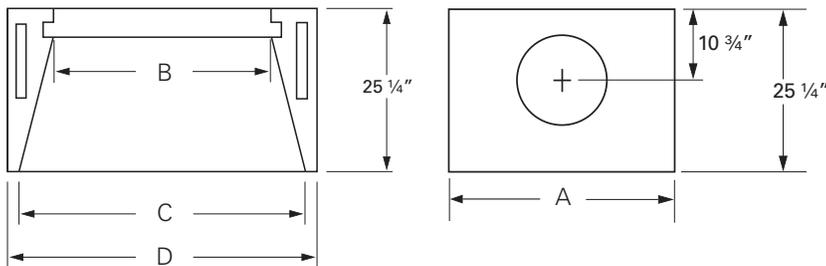

An option of two additional sets of side walls and backwalls is available. Please see Installation manual for framing height openings and instructions.

Burner Size & Efficiencies

MODEL	SIZE	FUEL	BTU/HR	P4
ISO-IBV36	24"	NG	65k/21k	42%
ISO-IBV36	24"	LP	50k/22k	42%
ISO-IBV46	30"	NG	75k/22k	46%
ISO-IBV46	30"	LP	60k/23k	46%

IMPORTANT NOTES: As with any heating appliance, fireplace or stove, this fireplace is extremely hot during operation. Read and understand all operating instructions before using this fireplace. For further information, consult your dealer. Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen and how the appliance is operated.


Diagrams, illustrations and photographs are not to scale - consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinue without notice.

earthcore[®]


©2017 Earthcore Industries, LLC
MKG1003-0917

Visit us online earthcore.co

Framing Dimensions

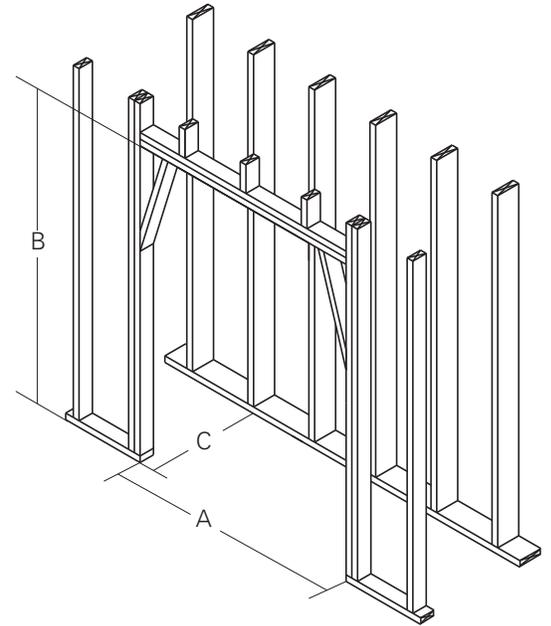

MODEL	A	B	C
BVETTO 36	43"	72"/83"/93"	26 3/4"
BVETTO 46	53"	72"/83"/93"	26 3/4"

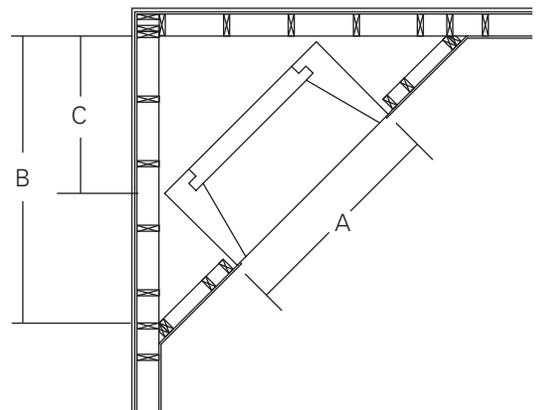

MODEL	A	B	C
BVETTO 36	43"	70"	32"
BVETTO 46	53"	77"	39"

*Featured on the Cover: Bvetto 36"
Split Firebrick - Red, Running Bond Pattern
Charred Hickory Log Set*

PFS[®]
C US

Tested & Listed to
ANSI Z21.50-2014
CSA 2.22-2014