## earthcore®

# ISOKERN FIREPLACES & CHIMNEYS

Fireplaces, Accessories & Venting Solutions

## INSIDE >

Earthcore's Ecosophy: Defining Green Page 4

Carl R. Spadaro
Our Mission
Page 6

New Product
Maximus Linear Series
Page 16





# WEMAKEFIRE... BETTER.

## **Custom Luxury Fireplaces**

Extracted from Iceland's Mt. Hekla volcano, Isokern brand products have been made from the cleanest, purest pumice for over 80 years. Our lightweight, insulating, masonry components cradle the raw power of fire in the safest, most energy-efficient material on earth. Totally customizable, Isokern allows architects and their clients to pursue their most inspired designs, while connecting with the natural beauty of fire.





## **Did You Know?**

Our pumice ships directly from the Mount Hekla Volcano in Iceland to our state-of-the-art automated manufacturing facility in Chesapeake, Virginia.



**Iceland** 



Chesapeake, VA

## Earthcore's Ecosophy



Since 1989, Earthcore continues to create and deliver earth-friendly products utilizing volcanic stone from Iceland's Mt. Hekla. Our clean, pure pumice is free of volatile organic (inert) components and dates back to over 6000 years, which is relatively young compared to other volcanic materials extracted around the globe. This exclusive pumice is lightweight and refractive (meaning fire-resistant), making all our products highly insulating and affordable.

Our pumice is mined from vast lava fields and then transported to our factory in Virginia, where the Isokern brand fireplaces and chimneys are manufactured using an over 80-year-old Danish technology. Not only do Isokern fireplaces exceed EPA standards for wood and gas fuel burning, our Green Tech solution helps reduce greenhouse emissions by an astonishing 80%.

We are proud to be the leader in green fireplaces and a carbon-free company.

## CONTENTS

2
4
6
8
1
3
5
7
9
1
23
:5
<b>?7</b>
29
1
3
5
6
7
9
0
1
2

Specifications......46



# 2020

## **Our Mission**

For over thirty years and during these rapidly changing times, we at Earthcore pride our success on the use of material derived directly from Mother Nature, Isokern's Icelandic volcanic pumice stone. We continue to recognize our responsibility to protect the planet, minimize our impact on the environment, and improve global sustainability in every component we manufacture.

As a result, we assure all our customers that they are contributing to a carbon-neutral environment through the purchase and installation of all Isokern products.

Our novel innovations and advanced technologies assist in lowering our carbon footprint, from the electricity used in our state-of-the-art manufacturing process to our new innovation production laboratory.

So, take a moment to read through our 2021 catalogue and please keep in mind that every Isokern you purchase, you are directly contributing to a cleaner planet since we are recycling a product from Mother Nature.

Your safety and a clean global environment are our main priorities, which is why at Earthcore, "We make fire...better."

A Name Built on Reliability for over

Years

Since 1989, we have proudly provided exceptional products combined with unmatched customer service from our 9 solution centers and dedicated network of over 500 dealers.

Carl R. Spadaro

Founder & CEO of Earthcore




## INNOVATION

In 2019, we completed our new innovation production laboratory to begin manufacturing our patented modulated gas fuel delivery system. After many years of research, we now have the ability to produce cost-effective opportunities in decorative gas fire features that go well beyond what markets offer today. All of our new offerings are made using high quality stainless steel that appeal to consumers who demand products that last a lifetime. This lab enables us to create more synergy between our pumice products and new inventions.



"Talent is a flame. Genius is a fire."

- Bernard Williams

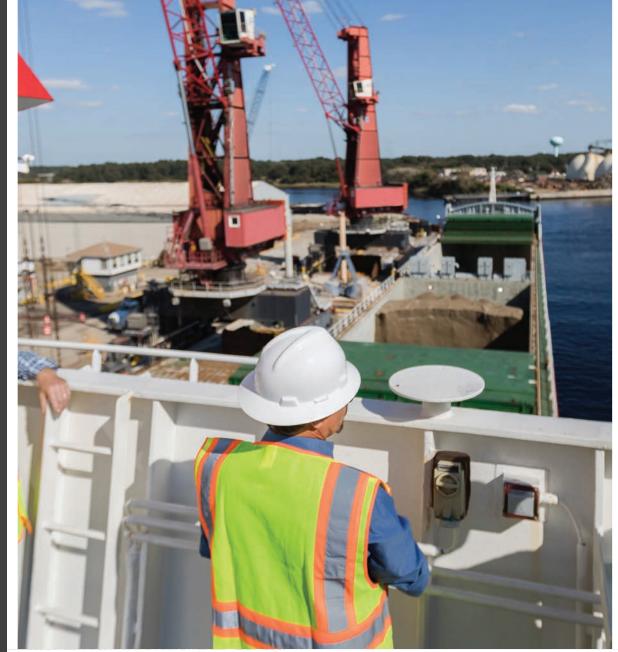






## **Modular Gas Delivery Systems**

The first product born out of our innovation facility is our patented modulated gas fuel delivery system with quick connect technology. Offered under our Isoflames brand, we are able to build the longest linear UL listed burners on the market.







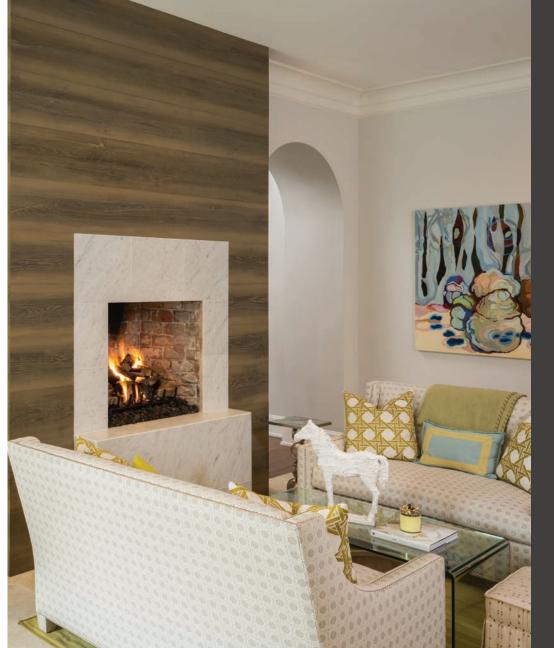





ALL FUEL

Offers wood or ga burning solutions

## STANDARD

Available Sizes: 36 • 42 • 46

As the first Isokern modular fireplace introduced in the United States, the modular construction of the Standard Series allows you to unleash your creative desires with a fireplace as unique as you are. Whether you choose wood burning, natural gas, or liquid propane, the Standard Series sets the standard. In an outdoor application, this fireplace can be finished with any veneer including brick, stone, stucco, or tile.

## **Applications**

Indoor
Outdoor
Wood Burning
Natural Gas
LP (Liquid Propane)
Multi-Sided Availability
DM54 Chimney
Eco-Steel Chimney
Custom Finish
Fire-Lite Application - see page 35





Offers wood or gas burning solutions

## MAGNUM

Available Sizes: 28 • 36 • 42 • 48 • 60 • 72

Looking for a larger, more dramatic opening fireplace? Look no further than the Isokern Magnum. This fireplace system is ideal for large custom homes, hotel lobbies and restaurants. Boasting opening heights of 38" tall and up to 72" wide, it will make a statement in any room.







## **Applications**

Indoor Outdoor Wood Burning Natural Gas LP (Liquid Propane) Multi-Sided Availability DM54 Chimney **Eco-Steel Chimney** Custom Finish Fire-Lite Application - see page 35







ALL FUEL

Offers wood or ga burning solutions

# MAGNUME

Available Sizes: 84 • 96 • 108 • 120

When you're designing a space that's larger than life, you need a fireplace to match it! **NEW** from Isokern is our ground-breaking Magnum+ Fireplace.

Boasting widths up to 10 feet and finished opening heights of 44", this stately fireplace is the largest UL listed fireplace on the market. Earthcore is always looking to expand the boundaries of fire, and with the Magnum+, fire has no boundaries.





## **Applications**

Indoor
Outdoor
Wood Burning
Natural Gas
LP (Liquid Propane)
Eco-Steel Chimney
Custom Finish





## **MAXIMUS** LINKAR

Available Sizes: 48 • 72 • 96 • 120

The Maximus Linear Series is contemporary sophistication with a sleek design that can be customized to fit any aesthetic. Choose an open or glass front firebox and finish it off with your choice of colored glass media or log set in driftwood finish. Isokern Linear Fireplace systems come with a Remote-Controlled Electronic Ignition System and Mechanical Exhaust Fan. The glass front unit does not use conditioned air from the room, complying with air quality control standards.

# Log Set **Option** Driftwood with the season with

## **Isoflames Linear Burner**

Each Isokern Maximus Linear comes standard with the Isoflames Linear Burner System. This patented quick connect system is a modular burner system that is easily installed and comes in sizes from 24" up to 96". It can also be used in any fireplace to give a more modern look to the traditional fireplace.

## **Applications**

Indoor Natural Gas LP (Liquid Propane) Custom Finish Combustible Floor Installation Zero Clearance to Open Front 12" B-Vent Chimney Electronic Ignition System Mechanical Exhaust Fan

Specifications - see page 49

## **Fireglass Options**









## Log Set **Options**









Sealed glass front

## 

TRADITIONAL Available Sizes: 46 • 48

The Isokern MAXIMUS Series is the first ever masonry direct vent fireplace. It offers an expansive ceramic glass opening with Invisi-Barrier and Triple Stadium Burner for exceptional appearance and flame presentation. This glass front unit does not use conditioned air from the room, complying with air quality control standards. With an array of options, the MAXIMUS provides endless possibilities for making your space warm and inviting.





## **Applications**

Indoor Natural Gas LP (Liquid Propane) Direct Vent Chimney Custom Finish Combustible Floor Installation



# BVEITO

Available Sizes: 36 • 46

Opening heights are sure to make a true statement in any living space with Isokern's Bvetto Series. As the first and only field assembled gas appliance fireplace, the Isokern Bvetto Series offers the largest available opening heights in the industry of 52". With our proprietary quick fire ignition system, the Isokern Bvetto requires our exclusive Isoflames Stadium Burner and log set.

\*Special Order Log Set



Western Driftwood \*



**Arizona Weathered Oak** 



Quaking Aspen \*



**Arizona Weathered Oak Charred** 







## **Applications**

Indoor Natural Gas LP (Liquid Propane) **B-Vent Chimney** Custom Finish Combustible Floor Installation







## 

Available Sizes: 36 • 42 • 46

A gas fireplace blends seamlessly into your home's footprint with the Isokern Vent-Free Series. This series offers a variety of opening heights and is fully customizable to fit any design plan. With its large, finished openings and see-thru availability, the Vent-Free Series is the perfect heating solution for any multi-family home, new home, remodeling project or outdoor concept.





## **Applications**

Indoor
Outdoor
Natural Gas
LP (Liquid Propane)
Multi-Sided Availability
Unvented
Custom Finish
Combustible Floor Installation



For Isokern Standard &

## 

## **Dual Module Chimney System**

The DM54 Chimney System is a zero clearance system made with our Icelandic pumice, a natural insulator, separating our system from all other chimneys. The insulating properties of pumice allow the flue gases in the chimney to quickly reach their optimum temperature, enabling the heating appliance to perform efficiently. It also keeps the chimney warmer longer as the heat output of the fireplace decreases. This not only aids performance, but reduces the likelihood of condensation and soot build-up.

Our component based system is made up of inner and outer blocks that are installed with staggered joints for safety and stability. The double layer of pumice blocks, separated by an air gap, maximizes the chimney performance. This system is the only masonry chimney system tested and listed to UL 103HT (2100° High Temperature) standards.

Specifications - see page 49







## **Iso-Caps**

Specifically designed by Earthcore for the Isokern DM54 flue liner, the Iso-Cap has minimal installation. Sealed with silicone caulk, each Iso-Cap simply slides into or over the inner flue liner of the DM54 chimney. **AVAILABLE WITH TOP SEAL DAMPER** 



The lightweight Venting Solution uses a locking-tab design, ensuring immediate and tight assembly. Using a 12 5/8" inner diameter and a 15 5/8" outer diameter, it is rated for any solid fuel Isokern Fireplace. This versatile system has been tested and approved for use with Isokern Standard and Magnum fireplaces in typical or Fire-Lite applications. Available in air-cooled (EcoSteel) or insulated (EcoSteel+).



NEW **Square Termination** 13ACECOSQ

Can be used with the EcoSteel air-cooled or insulated chimney systems.

## **EcoSteel**



## **Air-Cooled Chimney Flue**

6" - 13ACECO6

12" - 13ACECO12 18" - 13ACECO18

36" - 13ACECO36

48" - 13ACECO48



**Air-Cooled Anchor Plate** 

13ACECOAP



### **Air-Cooled Anchor Plate with Damper**

13ACECOAPD



**Air-Cooled** 15 Offset

13ACECO15OS



**Air-Cooled** 30 Offset

13ACECO30OS

### **EcoSteel+**



## **Insulated Chimney Flue**

Stainless Steel

6" - 13INECO6

12" - 13INECO12

18" - 13INECO18

36" - 13INECO36

48" - 13INECO48



### **Insulated Anchor Plate**

Stainless Steel

13INECOAP



### **Insulated Anchor Plate with Damper**

Stainless Steel

13INECOAPD



**Insulated 15 Offset** 

Stainless Steel

13INEC0150S



### **Insulated 30 Offset**

Stainless Steel

13INECO30OS



EcoSteel is an air-cooled chimney system with a stainless inner and galvanized outer.

EcoSteel+ is an insulated chimney system that is ideal for coastal areas, commercial applications, and venting that includes a mechanical chimney fan. It has stainless steel inner and outer construction.





#### **Round Chimney Cap** Stainless Steel

for Shroud Installation

13ACECOCC

**Chase Flashing** 

13ACECOFC

Rain Cap

13ACECORC

**Wall Band** 

13ACECOWB



**Tall Cone Flashing** 13ACECOFT





**Support Band** 

**Storm Collar** 

13ACECOSC



**Attic Insulation Shield** 13ACECOIS

**Firestop Assembly** 

13ACECOFS



**Adjustable Support** 13ACECOAS





1/12 to 5/12 Flashing



6/12 to 10/12 Flashing 13ACEOF10





# MECHANICAL VENTING

## **Multi-Venting Solutions**

A gas-fired fireplace creates a flame that's just the right size: not too high, not too low. But to achieve the perfect fire, you need the perfect draft. That's why Isokern and Enervex, two leaders in the fireplace and venting industries, have teamed up to develop the Multi-story Fireplace Exhaust System (MFES). With this innovative technology, a single exhaust system can vent multiple gas-fired fireplaces in a single chimney. This means that up to 25 gas fireplaces or 12 fireplaces of solid fuel can achieve an optimal draft — regardless of how many fires are burning simultaneously.

Fireplaces usually require individual chimneys. But in multi-story condominiums and apartments, this can greatly impact space allocation and increase costs. The MFES solution, however, allows a single chimney to accommodate multiple fireplaces, eliminating the space constraint while keeping construction budgets manageable.

The MFES is unique in that it monitors the operation of multiple fireplaces in multi-story buildings. Fireplaces are monitored through an integrated electronic system, allowing each unit to operate individually. With a system engineered and installed by Enervex, and fireplaces supplied by Isokern, a multi-vented system for multi-family housing is now more cost-efficient and reliable than ever.



## Modulating hi-temp exhaust fan EBC 30 control from Enervex which monitors the draft The ADF control damper is actuated by the fireplace controller The fireplace controller which

monitors the fireplace and is connected to the gas valve

## **Intellidraft Venting Solution**

Maintaining proper and safe draft conditions for the fireplace while providing combustion air are massive challenges in today's tight construction. Now, you can set new standards in fireplace safety and energy savings for your gas fireplace or other gas-fired decorative appliances. Meet Intellidraft, ENERVEX's Modulating Fireplace Draft and Safety System.

IntelliDraft is an economical, environmentally friendly, intelligent draft solution that quietly maintains perfect draft for fireplaces while keeping homes from chimney downdraft and fireplace spillage. It is the first completely automated venting control system for use with gas fireplaces and is ideal for single family dwellings.

## **Mechanical Fan**

The Enervex RS/RSHT Chimney Fans are mounted on top of the chimney, leaving little to no mess during installation.

The fan comes with speed control. You should mount the fan speed control in the room with the fireplace so you can adjust the speed (and draft) from there.

## ISOKERN

## RM40

### **Mono Flue Chimney System**

Our 16" Diameter EM 40 Universal Flue is the largest insulating masonry chimney available. With proprietary "Air-Vent" technology, it will not crack like cheaper concrete alternatives. Used exclusively for outdoor applications, it requires a 2" clearance to combustible materials.

## **Isokern Accessories**



Specifically designed for the Isokern 16" EM mono flue, this stainless cap is easily installed. This cap slides on top of the em-40 mono flue.



### **Cast Iron Damper**



This cast iron damper is designed to sit in the throat of the Isokern fireplace and can be opened and closed with the poker control. Sizes available: 33", 42", 60", & 72".




### **Sealed Cast Iron Throat Damper**

This improved product complies with Air Quality Management regulations supplied with an air-tight high temperature fiberglass gasket as opposed to loose-fitted glass doors. This damper utilizes a high temperature fiberglass gasket to prevent down drafts in a closed position. Sizes available: 33" & 42".

### **Bottom Mount Damper**

The bottom mount damper is a proprietary design to be used when a conventional poker or top-mount damper is not feasible. Great with see-through applications, this type of damper can be paired with either the DM54 or steel chimney systems.





#### **Cast Iron Grates**

Our cast iron grates hold wood logs for proper ventilation, maximizing the burn of your solid fuels.

XB SIZES AVAILABLE: 24", 30", 36" HL SIZES AVAILABLE: 23", 27"



#### **Earthcore Adhesive**

The earthcore adhesive is a proprietary thin set, which is used in all Isokern component installations. It also can be used for porcelain ceramic tile and fabricated or cast stone products. See installation manual for the required amount of adhesive for each fireplace. One 5 gallon pail per 10'-12' of DM54 masonry chimney.

#### **Outside Air Kit**

The outside air inlet allows fresh air into the firebox to improve drafting performance. (It does not guarantee perfect drafting in air-tight homes.) These kits come in stainless and black slide doors, 4" inch diameter UL tubing with stainless termination.






31





## FIREBRICK

Make your fireplace a part of your home's decor with Isokern's Firebrick options. Typically made of fire clay or siliceous material, our Firebrick is a refractory brick, capable of sustaining intense heat without fusion. And since it's not prone to expansion or contraction, this material helps minimize cracking under extreme heating conditions. Coloration and size varies slightly.

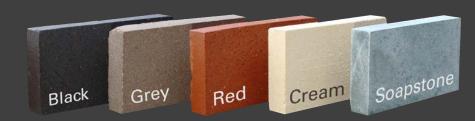



## **ISOSET** Firebrick Mortar

Isoset Brick Mortar, a thinset masonry adhesive, can be used in either interiors or exteriors for installing firebrick. It is the specified firebrick mortar to be used in all Isokern fireplaces. Isoset is available in 50lb buckets. Approximately 50lbs of prepared mortar will lay firebrick for fireplaces up to 48".

## **Firebrick Sizes**

Fulls: 9" x 4-1/2" x 2-1/2" **Splits:** 9" × 4-1/2" × 1-1/4" Soaps:  $9'' \times 2-1/4'' \times 1-1/4''*$ \*Red & Cream Firebrick ONLY




















## **Vent-Free Log Sets**

Lively flames and a large ember bed highlight the handcrafted logs, adding efficient heat and unmatched beauty to your fireplace. Featuring either an Indoor (Black) or Outdoor (Stainless) burner with three log set options: Weathered Oak, Red Oak, and Split Oak.

Available Sizes: 24" & 30"



Weathered Oak



Red Oak



**Split Oak** 

Decorative

Unvented Gas Appliance

## **Vented Log Sets**

The Isoflames three tiered burner system creates high and full bodied flames. Featuring an Indoor (Black) burner with four log set options: Arizona Weathered Oak, Arizona Weathered Oak Charred, Western Driftwood, and Quaking Aspen.

Available Sizes: 24", 36"

Special Order Sizes: 30", 42" & 48"



## ISOFLAMES

Take your fireplace's flames to new heights with Isokern's Isoflame Log Sets. Our Vented and Vent-free Gas Log Sets have lively flames and large ember beds to highlight our remarkable craftsmanship. With efficient heat and unmatched beauty, each log set is available with an adjustable flame height remote control and electronic ignition.

## Jumbo Slimline Vented Log Set

Arizona Weathered Oak only.



## GRENTECH

Enjoy the warmth of a wood burning fire while contributing to a cleaner environment. The Green Tech Solution by Earthcore can be easily installed in a matter of minutes and reduce particulate emissions by up to 80%. While your fireplace is in use, the direct flame cleans the Green Tech Catalytic Combustor, resulting in a maintenance free solution for cleaner air in and outside of your home. This exclusive Earthcore catalytic combustor can be added to any Isokern Magnum or Standard Series fireplace.

The Green Tech series was designed

This easy-to-install design takes the

enjoying your wood burning fireplace.

made to retrofit into any masonry fireplace.

environment into consideration while still

- EPA Phase II qualified
- Reduces emission particulates by 80%
- Rated for both solid fuel and gas fireplaces
- Available for all Standard and Magnum Fireplaces

**Green Tech Catalytic** Combustor






Have the wonderful ambiance of fire anywhere in your home with Isokern's Fire-Lite Application. Both the Isokern Magnum and Standard Series can be placed directly on a combustible floor or recessed into any combustible floor system. This is a UL tested and listed application. Details are available on our website.

Reduction

in carbon emissions

with Green Tech

**Eco-Steel** Chimney



**Eco-Steel Anchor Plate** 

\* For installing Isokern Standard or Magnum Fireplaces on combustible flooring



IsoWool

**Combustible Deck** 

Installed by Home Builder/Developer


Combustible Flooring

Installed by



## **CHIMNEY**

Give your venting style with Isokern's Elemetal Chimney

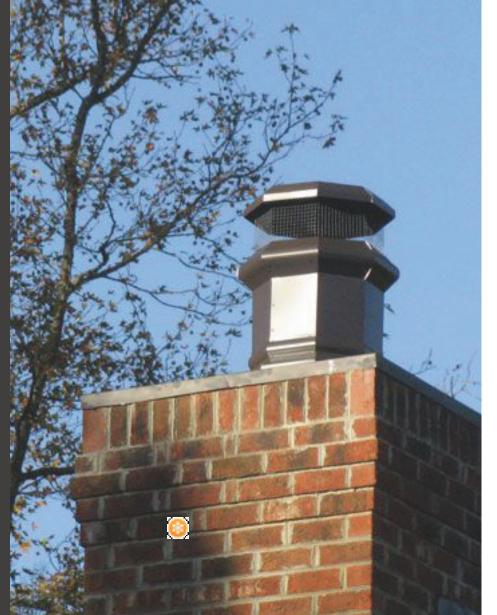

## **European Copper**

Give your fireplace the finishing touch it deserves with Isokern's European Copper Chimney Pots. The patented chimney pots meet the highest technical standards through its UL listing and compliance with International Building Codes. The European Copper chimney pots are unique in that they are compatible with both masonry and metal flue, giving you more options and consistent quality.





Weight 36 lbs | Height 48" | Base 24"



#### Queen

Weight 26 lbs | Height 41" | Base 20"



### Knight I

Weight 36 lbs | Height 44" | Base 21"



### Knight II

Weight 20 lbs | Height 38" | Base 16"



#### Bishop I

Weight 47 lbs | Height 52" | Base 26"



### Bishop II

Weight 36 lbs | Height 39" | Base 20"



Weight 17 lbs | Height 25" | Base 20"

## **Elemetal**

Pots. Our decorative steel pots have all the appeal of the popular traditional clay pots at a fraction of the weight and cost. Earthcore's decorative steel pots are fashioned from 24" gauge, colored, Kynar steel. They are available in five standard colors and come with a 20-year warranty.



**Weathered Copper** 

Muskett



Black

Copper Ultramet: SQOCT-2138-CU Terracotta: SQOCT-2138-TC Weathered Copper: SQOCT-2138-WC Muskett: SQOCT-2138-MU Black: SQOCT-2138-BK 37 lbs | 38" H | 21" ID

Ontario

Terracotta



## Portsmouth

Copper Ultramet: OCT-2136-CU Terracotta: OCT-2136-TC Weathered Copper: OCT-2136-WC Muskett: OCT-2136-MU Black: OCT-2136-BK

37 lbs | 36" H | 21" ID



### Dorchester

Copper Ultramet: SQ-2326-CU Terracotta: SQ-2326-TC Weathered Copper: SQ-2326-WC Muskett: SQ-2326-MU Black: SQ-2326-BK 46 lbs | 26" H | 23" ID



38

Copper Ultramet: ROU-2832-CU

Weathered Copper: ROU-2832-WC

Terracotta: ROU-2832-TC

Muskett: ROU-2832-MU

46 lbs | 32" H | 28" ID

Black: ROU-2832-BK

**Copper Ultramet** 



## **OUTDOOR**

Kitchens, Pizza Oven, Fireplaces & more

The possibilities are limitless when it comes to building your outdoor dream kitchen with our Isopanels. We streamlined the construction of building an outdoor kitchen for quick assembly using our panels and clip system.

## **ISOPANELS**

**Isokern Panels** Components

Each panel weighs only 100 lbs, so they're easily moved when assembling your new outdoor kitchen components.



**Clip Styles** 

Use: Slide the appropriate clip over the junction of 2 adjacent panels for holding them together while the nortar is applied.

















## Kamado Grill

Saffire Grills takes an innovative step forward for Kamados, with the patented Smokin' Chip Feeder Port and Crucible Firebox, plus extra thick, kilnfired ceramics and heavy-duty hardware. The Saffire is the perfect addition to any Isokern outdoor kitchen design.

The user-friendly, remarkably affordable, outdoor wood burning pizza oven is made from our exclusive volcanic material. Created for easy installation, the Iso'ven Wood Burning Pizza Oven comes with everything you need to get started, including an accessory package of helpful cooking tools.

## **Optional Storage Base**

**ISO'VEN** 

The ideal companion for your Iso'ven Wood Burning Pizza Oven — our Optional Storage Base. It allows you to choose the height of your Iso'ven in relation to the rest of your outdoor kitchen or living space. Installed as-is, with no customization, our Iso'ven base is the perfect height to pair with one of our Isokern outdoor fireplaces.

### **Includes**

- 1. Utility Tong
- 2. (2) 12" Pizza Screens
- 3. 26" Pizza Peel
- 4. Coal Rake
- 5. Grill Glove

## Oven Hood

Following the

classic approach of traditional wood burning ovens, the Iso'ven is designed to vent through the front. But at Earthcore, we believe customization creates satisfaction. So, if you prefer a flue, we now offer a hood for the Iso'ven, giving you the freedom to finish it in your own personal style.




## **OUTDOOR** BUKNEK

Available Sizes: 21" Square • 50" Linear

Earthcore is proud to announce a brand new product: ISOFLAMES Outdoor Burners are now available! Constructed of 100% stainless steel and available in two sizes, they are designed to withstand weather without warping or rusting, making them the perfect accent for your fire table. The Isoflames Burner includes Vesper Black glass media and key valve with propane tank connection.



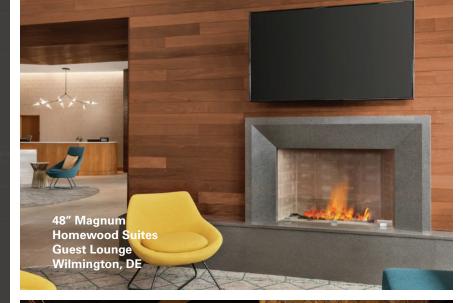





## **COMMERCIAL** PROJECTS

Earthcore not only lives in the residential space but also finds its way onto many different commercial projects, from a 33' custom linear fireplace in a wine depository to hotel lobbies and restaurant dining areas. Our commercial division has been awarded numerous projects across America, and our teams adapt to customers' needs in a timely, cost effective manner. With our innovative and collaborative expertise, we offer unparalleled quality to make every project a success.
















## SPECIFICATIONS

Fireplace Dimensions & Measurements


## Magnum

Framing & Weight									
Model	Part Number	Minimum Framing	Weight						
60	82060	(76 1/2"w) x (87 1/4"h) x (29 1/2"d)	2652 lbs						
72	82072	(88 7/8"w) x (87 1/4"h) x (29 1/2"d)	2952 lbs						



Front View






ıts	Mode	el A	В	С	D	E	F	G	Н	-1	J	K	L	M	S	Т
rements	60	53 1/2"	85 3/4"	38"	57 1/4"	69"	73 1/2"	9 1/2"	25 1/4"	28 3/4"	44 3/4"	32"	8″	5″	28"	23"
Measur	72	66"	85 3/4"	38"	69 1/4"	81 1/4"	85 1/2"	9 1/2"	25 1/4"	28 3/4"	44 3/4"	32"	8"	5″	28"	23"
Me																

## Standard

Framing & Weight											
Model	Part Number	Minimum Framing	Weight								
36	80536	(46"w) x (65"h) x (26 3/4"d)	1205 lbs								
42	80542	(52"w) x (65"h) x (26 3/4"d)	1325 lbs								
46	80546	(56"w) x (65"h) x (26 3/4"d)	1450 lbs								






Plan View	

ıts	Model	Α	В	С	D	E	F	G	Н	ı	J	K	L	М	s	T
mer	36	33"	63 1/4"	31 1/2"	27 1/4"	37 1/8"	43"	10 1/2"	25 1/4"	28 3/4"	34 1/2"	16"	8″	5″	25 1/4"	20 1/4"
Measuremen	42	33"	63 1/4"	31 1/2"	33 1/4"	43 1/8"	49"	10 1/2"	25 1/4"	28 3/4"	34 1/2"	16"	8"	5″	25 1/4"	20 1/4"
Mea	46	33"	63 1/4"	31 1/2"	37 1/4"	47 1/8"	53"	10 1/2"	25 1/4"	28 3/4"	34 1/2"	16"	8"	5″	25 1/4"	20 1/4"

## Magnum +

Framing & Weight												
Model	Part Number	Minimum Framing	Weight									
84	82084	(99"w) x (97"h) x (29 1/2"d)	1040 lbs									
96	82096	(111 1/2"w) x (97"h) x (29 1/2"d)	1305 lbs									
108	82108	(123 1/2"w) x (97"h) x (29 1/2"d)	1425 lbs									
120	82120	(135"w) x (97"h) x (29 1/2"d)	1600 lbs									




Side View


-	Plan View
L	


ts	Mod	lel A	В	С	D	E	F	Н	1.0	J	K	L	M	S	Т
nen	84	74 11/16"	94 1/2"	47 1/16"	83 1/16"	91 1/16"	95 11/16"	25 1/4"	44 3/4"	50 1/2"	32"	8″	5″	28"	23"
Iren	96	88 1/16"	93 11/16"	47 1/16"	95 5/8"	103 5/8"	108 3/16"	25 1/4"	44 3/4"	50 1/2"	32"	8"	5"	28"	23"
asn	108	100 3/16"	94 1/2"	47 1/16"	107 5/8"	115 5/8"	120 3/16"	25 1/4"	44 3/4"	50 1/2"	32"	8"	5″	28"	23"
Me	120	111 5/8"	94 1/2"	47 1/16"	119 1/8"	127 1/8"	131 3/4"	25 1/4"	44 3/4"	50 1/2"	32"	8″	5"	28"	23"

## Magnum

Framing & Weight											
Model	Part Numb	er Minimu	ım Framing	Weight							
28	82028	(38 1/2"w) x (61 1/	'2"h) x (29 1/2"d)	1040 lbs							
36	82036	(46"w) x (71"h	n) x (29 1/2"d)	1305 lbs							
42	82042	(52"w) x (71"h	n) x (29 1/2"d)	1425 lbs							
48	82048	(56"w) x (71"h	) x (29 1/2"d)	1600 lbs							
w	Model A	В	C D	E							








									,			<b>€</b> м			
Mode	el A	В	С	D	E	F	G	Н	- 1	J	K	L	М	S	Т
28	22 1/4"	60 1/4"	28 1/2"	19 3/4"	31"	35 1/2"	9 1/2"	25 1/4"	28 3/4"	31 1/2"	16"	8″	5"	28"	23"
36	33"	69 3/4"	38"	27 1/4"	38 3/4"	43"	9 1/2"	25 1/4"	28 3/4"	41"	16"	8"	5″	28"	23"
42	33"	69 3/4"	38"	33 1/4"	44 1/2"	49"	9 1/2"	25 1/4"	28 3/4"	41"	16"	8″	5″	28"	23"
48	43"	69 3/4"	38"	37 1/4"	48 1/2"	53"	9 1/2"	25 1/4"	28 3/4"	41"	16"	8″	5″	28"	23"

## Maximus

Framing & Weight												
Model	Part Number	Minimum Framing	Weight									
46	80D46	(56"w) x (65"h) x (26 3/4"d)	1450 lbs									
48	82D48	(56"w) x (71"h) x (29 1/2"d)	1600 lbs									



														IVI		
	Model	Α	В	С	D	E	F	G	Н	- 1	J	K	L	М	S	Т
remen	46	43"	63 1/4"	31 1/2"	37 1/4"	47 1/8"	53"	10 1/2"	25 1/4"	28 3/4"	34 1/2"	16"	8"	5″	25 1/4"	20 1/4"
Measur	48	43"	69 3/4"	38"	37 1/4"	48 1/2"	53"	9 1/2"	28"	28 3/4"	41"	16"	8"	5"	28"	23"
Š																





## SPECIFICATIONS

Fireplace Dimensions & Measurements

## **Maximus Linear Glass Front**

Framing & Weight								
Part Number	Minimum Framing							
82L48/GFK-48	(56"w) x (64 ½"h) x (29 ½"d)							
82L72/GFK-72	(89"w) x (64 ½"h) x (29 ½"d)							
82L96/GFK-96	(112"w) x (64 ½"h) x (29 ½"d)							
82L120/GFK-120	(112"w) x (64 ½"h) x (29 ½"d)							
	Part Number 82L48/GFK-48 82L72/GFK-72 82L96/GFK-96							








ts	Mode	I A	В	С	D	E	F	Н	ı	J	M
neu	48	43"	62 7/8"	52 3/4"	20 5/8"	8″	18 7/8"	45 3/16"	15″	29 7/8"	5"
ıren	72	76"	62 7/8"	85 13/16"	20 5/8"	8″	18 7/8"	78 1/4"	16 5/8"	29 7/8"	5″
leasn	96	99 1/4"	62 7/8"	109"	20 5/8"	8″	18 7/8"	100 5/8"	16 5/8"	29 7/8"	5″
Me	120	122 1/4"	62 7/8"	132"	20 5/8"	8″	18 7/8"	124 1/8"	16 5/8"	29 7/8"	5"

## **Vent-Free**

	Framing & Weight									
Model	Part Number	Minimum Framing	Weight							
36	81036	(43"w) x (37 1/2"h) x (25 1/4"d)	715 lbs							
42	81042	(49"w) x (37 1/2"h) x (25 1/4"d)	820 lbs							
46	81046	(53"w) x (37 1/2"h) x (25 1/4"d)	880 lbs							









ıts	Mode	l B	С	D	E	F	G	Н	I	J	M	S	Т
Measurements	36	37 1/2"	31 1/2"	27 1/4"	37 1/8"	43"	10 1/2"	25 1/4"	28 3/4"	34 1/2"	5"	25 1/4"	20 1/4"
sure	42	37 1/2"	31 1/2"	33 1/4"	43 1/8"	49"	10 1/2"	25 1/4"	28 3/4"	34 1/2"	5"	25 1/4"	20 1/4"
Mea	46	37 1/2"	31 1/2"	37 1/4"	47 1/8"	53"	10 1/2"	25 1/4"	28 3/4"	34 1/2"	5″	25 1/4"	20 1/4"

Please Note: Zero clearance to combustible material.

## **Maximus Linear Open Front**

	Framing & Weight								
Model	Part Number	Minimum Framing							
48	82L48	(56"w) x (64 ½"h) x (29 ½"d)							
72	82L72	(89"w) x (64 ½"h) x (29 ½"d)							
96	82L96	(112"w) x (64 ½"h) x (29 ½"d)							
120	82L120	(112"w) x (64 ½"h) x (29 ½"d)							







ts	Mode	I A	В	С	D	E	F	н	ı	J	М
ments	48	43"	51"	52 3/4"	20 5/8"	8″	18 7/8"	45 3/16"	16 3/8"	45 3/16"	5″
ā	72	76"	51"	85 13/16"	20 5/8"	8″	18 7/8"	78 1/4"	16 3/8"	78 1/4"	5″
easu	96	99 1/4"	51"	109"	20 5/8"	8″	18 7/8"	100 5/8"	16 3/8"	100 5/8"	5″
Me	120	122 1/4"	51"	132"	20 5/8"	8″	18 7/8"	124 1/8"	16 3/8"	124 1/8"	5″

## **Bvetto**

Framing & Weight									
Model	Part Numb	er Minimum Framing	Weight						
36	80B36	(44"w) x (71 1/4"h) x (26 3/4"d)	1500 lbs						
46	80B46	(54"w) x (71 1/4"h) x (26 3/4"d)	1700 lbs						





ents	Mod	lel A	В	С	D	E	F	G	Н	- 1	J	K	L	M	S	T
emen	36	22 1/2"	71 1/4"	31 1/2"	27 1/4"	36 1/8"	43"	10 1/2"	25 1/4"	36 3/4"	34 1/2"	16"	16"	5″	25 1/4"	20 1/4"
Measuremo	46	33 1/2"	71 1/4"	31 1/2"	37 1/4"	48 1/8"	53"	10 1/2"	25 1/4"	36 3/4"	34 1/2"	16"	16"	5″	25 1/4"	20 1/4"
2																

## **DM54**

Parts	Α	В	С
Starter Block	16 1/2"	13.5″	6"
Outer Casting	21 1/2"	21 1/2"	12"
Inner Flue	16 1/2"	13.5"	12"

31 1/2" 31 1/2" 3"









Parts	Α	В	С	D	E
Offset Block	21 1/2"	25"	11"	3″	6"





37 1/2" 37 1/2" 1 1/4" 3"



48

## SPECIFICATIONS

Fease Note

4" firebrick must be used on the side walls of these units. For the Magnum 60 & 72 models, you will need 60 additional full or split firebricks. To achieve this for the Magnum+ models, you will need 70 additional full or split firebricks.

## Firebrick Sizes & Dimensions

## **Standard**

nts	36	42	46
Measurements	R Full/Split: 100	R Full/Split: 100	R Full/Split: 100
	H Full/Split: 120	H Full/Split: 120	H Full/Split: 120
Meast	R Soaps: 200	R Soaps: 200	R Soaps: 200
	H Soaps: 240	H Soaps: 240	H Soaps: 240

## **Maximus**

nts	46	48
Measurements	R Full/Split: 100 H Full/Split: 120	R Full/Split: 130 H Full/Split: 150
Meası	R Soaps: 200 H Soaps: 240	R Soaps: 260 H Soaps: 300



# Available Colors Black Grey Red Cream Scapeford Pattern Guide \* Please Not

## **Maximus Linear**

nts	48	72	96	120
Measurements	R Full: 20	R Full: 30	R Full: 40	R Full: 50
	& Split: 50	& Split: 60	& Split: 70	& Split: 80
Measu	H Full: 20	H Full: 30	H Full: 40	H Full: 50
	& Split: 60	& Split: 75	& Split: 80	& Split: 100



## Magnum

nts	28	36	42	48	*60	*72
urements	R Full/Split: 100	R Full/Split: 100	R Full/Split: 120	R Full/Split: 130	R Full: 60	R Full: 60
	H Full/Split: 120	H Full/Split: 140	H Full/Split: 140	H Full/Split: 150	& Split: 160	& Split: 180
Measu	R Soaps: 200	R Soaps: 240	R Soaps: 240	R Soaps: 260	H Full: 60	H Full: 60
	H Soaps: 240	H Soaps: 280	H Soaps: 280	H Soaps: 300	& Split: 180	& Split: 200



## **Bvetto**

nts	36	46	per extension
Measurements	R Full/Split: 100	R Full/Split: 100	R Full/Split: 20
	H Full/Split: 120	H Full/Split: 120	H Full/Split: 25
Meast	R Soaps: 200	R Soaps: 200	R Soaps: 40
	H Soaps: 240	H Soaps: 240	H Soaps: 50



## Magnum +

t t	*84	*96	*108	*120
Measurements	R Full: 220	R Full: 250	R Full: 270	R Full: 290
	& Split: 70	& Split: 70	& Split: 70	& Split: 70
Meag	H Full: 240	H Full: 270	H Full: 300	H Full: 320
	& Split: 70	& Split: 70	& Split: 70	& Split: 70



## **Vent-Free**

nts	36	42	46
ırements	R Full/Split: 100	R Full/Split: 100	R Full/Split: 100
	H Full/Split: 120	H Full/Split: 120	H Full/Split: 120
Measure	R Soaps: 200	R Soaps: 200	R Soaps: 200
	H Soaps: 240	H Soaps: 240	H Soaps: 240





### **Branch Offices**

Atlanta, GA

Houston, TX

Charlotte, NC

Camarillo, CA

Austin, TX

Phoenix, AZ

1.800.642.2920 earthcore.com

### Jacksonville, FL **Corporate / Branch Office**

6899 Phillips Industrial Blvd. Jacksonville, FL 32256 904-363-3417

## Chesapeake, VA

## **Manufacturing / Distribution**

4000 Holland Blvd. Chesapeake, VA 23323

### Corona, CA **Warehouse / Distribution**

620 W Rincon Street Corona, CA 92880 951-738-9702

### Dallas, TX **Distribution / Branch Office**

2128 Crown Road Dallas, TX 75229 972-247-2311